AMERICAN SANGE

QUALITY PROFESSIONAL COOKING EQUIPMENT

36" ICONICA RANGES (DUAL FUEL)

PERFORMER OPEN BURNERS



RANGE TOP FEATURES

- True commercial lift-off burners for easy cleaning.
- Three sizes of burners to serve your everyday needs:
 25,000 BTU (lg), 18,000 BTU (med), 12,000 BTU (sm)
- Variable flame settings for all Performer open burners.
- Automatic, electronic re-ignition.
- Continuous cast iron grates allow for easy transfer of pots and pans across the entire cooking surface.
- Porcelainized burner pans catch spills and lift out for easy cleaning.
- Dual action valves provide easy, safe operation.
- Stainless steel Island Back trim included and installed.

OVEN FEATURES

36" Convection Oven (6.2 c.f.)

Bake element 3,500 watts

Broil element 3,500 watts

Convection element 2,500 watts


Modes: Bake, Convection Bake, Broil, Fan, Roast, Convection Roast, Warm, Proof, Dehydrate, Clean


- Red lights indicate oven functions.
- The Advanced Cooking System creates uniform air flow by cycling different elements depending on cooking mode.
- Two chrome plated, heavy-duty racks with six positions on heavy gauge chrome side supports.
- Eight-pass broiler provides rapid searing with 3,500 watts of power.
- Large oven accommodates full size commercial sheet pans.
- Oven lights controlled by switch on front panel. Oven front construction is a durable, precision-made one piece frame.

AMERICAN PANDE

ARROB-364GDDF Shown with optional leg caps.







ARROB-366DF

ARROB-364GDDF

ARROB-364GRDF

CONVECTION OVEN TECHNOLOGY



Balanced heat distribution is essential when baking, roasting, and dehydrating food. The American Range convection oven technology features a convection motor and louvered side panels to enhance uniform heat distribution throughout the large oven cavity. The strategic placement of

the convection fan ensures consistent heat distribution.

CONVECTION OVENS ARE GREEN TECHNOLOGY

The highly efficient design of the Convection Oven uses less gas versus a standard oven.

BURNER CONFIGURATIONS

• 25,000 BTU (lg) • 18,0	00 BTU (md) 12,000 BTU (sm)
--------------------------	-----------------------------

CUSTOMIZE YOUR RANGE

Pick any RAL color to match the color that best suits your lifestyle.






See ralcolorchart.com for color options for the front panel and toe kick. Knobs cannot be customized.






36" PERFORMER ICONICA RANGES – DUAL FUEL

OPEN BURNERS/ELECTRIC OVEN

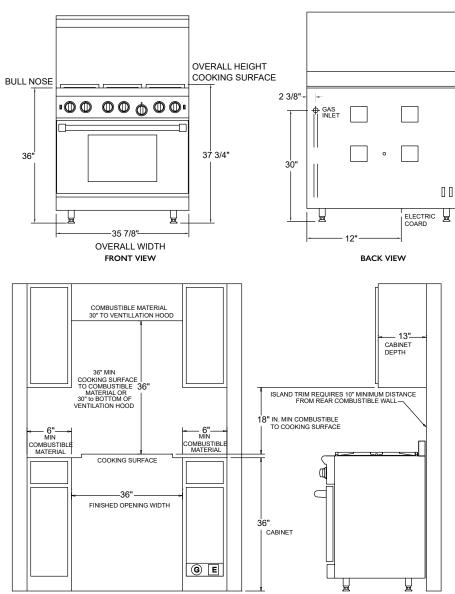

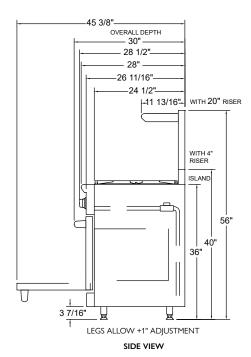

MUST SHIP FROM FACTORY WITH PROPER GAS TYPE

N=Natural gas L=LP Gas. Must provide N or L after model number for type of gas needed. (Example: ARR366DF-L). Must specify elevation if over 2000 ft. when ordering.

* ELECTRICAL REQUIREMENTS 4-wire, 240VAC, 50 AMP.

A manual gas shut-off valve must be installed external to the appliance, in a location accessible from the front, for the purpose of shutting off the gas supply. This is a vented appliance. To be used in conjunction with a suitable vent hood only.

**The American Range Company continually improves its products and reserves the right to change materials, specifications and dimensions without notice. This unit is manufactured for residential use only.

© E RECOMMENDED LOCATION OF GAS AND ELECTRICAL SUPPLY

ISLAND OR PENINSULA INSTALLATIONS 10" MINIMUM CLEARANCE FROM BACK OF RANGE TO COMBUSTIBLE SURFACE

ISLAND TRIM () IN. CLEARANCE TO NON COMBUSTIBLE SURFACE NO SIDE WALL ABOVE COOKING SURFACE

TECHNICAL SPECIFICATIONS

Overall Oven Capacity	6.2 CU. FT.	Electrical Supply	240 VAC 50 AMP 60 Hz Single Phase	
Oven Cavity Dimensions	31 3/4" W x 20 1/2" D x 16 1/2" H (806 x 521 x 419)	Gas Supply	7" W.C. Natural, 11" W.C. Propane	
Surface Burner Rating	25,000 BTU (lg) - 18,000 BTU (md) - 12,000 BTU (sm)	Broil Element	3,500 watts	
Griddle Burner Rating	20,000 BTU for every 11" section	Bake Element	3,500 watts	
Grill Burner Rating	15,000 BTU for every 11" section	Convection Element	2,500 watts	
		Total Gas Shinning		

Model Number	Description	Overall Dimensions	Connection Rating	Weight	Crated Dimension
ARROB-366DF	6 burners	35 7/8" W x 30" D x 37 3/4" H (911 x 762 x 959)	123,000 BTU (36 kW)	420 Lbs (190 kg)	38" W × 31" D × 45 1/2" H (965 × 788 × 1156)
ARROB-364GDDF	4 burners and griddle	35 7/8" W x 30" D x 37 3/4" H (911 x 762 x 959)	100,000 BTU (29 kW)	428 Lbs (195 kg)	38" W x 31" D x 45 1/2" H (965 x 788 x 1156)
ARROB-364GRDF	4 burners and grill	35 7/8" W x 30" D x 37 3/4" H (911 x 762 x 959)	95,000 BTU (28 kW)	412 Lbs (187 kg)	38" W x 31" D x 45 1/2" H (965 x 788 x 1156)

OPTIONS (FACTORY INSTALLED) ACCESSORIES 1" Island Back (standard) ARR-48SIB 12" Griddle Cover ARR-GDCOV12-S Wok Adapter ARR-WOK 11" Chrome Flat Griddle Plate MC11-FS 1" Island Back (welded) ARR-48IB 12" Grill Cover ARR-GRCOV12 Porcelainized Broiler Pan R31005 11" Chrome Grooved Griddle Plate MC11-GG ARR-PGP12 Extra Oven Rack - 30" Oven 4" Stub Back ARR-484SB 12" Griddle Plate R31038 20" High Back w/ Shelf ARR-4821HBS S/S Leg Caps (2) ARR-2LC Easy Glide Rack 30" R31034 ARR-CUTB-12 ARR48CB 12" Cutting Board S/S Curb Base

NMFCCODE: 25970-2 Class: 85 © Copyright 2022 American Range All Rights Reserved R70437 RevB 08312022



4580 N Walnut Rd 13592 Desmond St N. Las Vegas, NV 89081 Pacoima, CA 91331 (888) 753-9898 www.AmericanRangehome.com